

An Intelligent System for Classification of the Communication Formats Using PSO

Ata E. Zadeh Shermeh and Reza Ghaderi
Faculty of Electrical and Computer Engineering,
Babol Noshirvani University of Technology, Iran
E-mail: ataebrahim@yahoo.com, r.ghaderi@nit.ac.ir

Keywords: classification of communication signals, particle swarm, higher order statistics, supervised learning

Received: May 23, 2007

Text Automatic identification of digital signal types is of interest for both civil and military applications. This paper presents an efficient signal type identifier that includes a variety of digital signals. In this method, a combination of higher order moments (HOM) and higher order cumulants (HOC) are used as the features. A multi-layer perceptron neural network with SASS learning algorithm is proposed to determine the membership of the received signal. We have used swarm intelligence (SI) for feature selection in order to reduce the complexity of the classifier. Simulations results show that the proposed method has high performance for identification of different kinds of digital signal even at very low SNRs. This high efficiency is achieved with only seven features, which have been selected using particle swarm optimizer.

Povzetek: Opisana je metoda za identifikacijo digitalnih signalov.

1 Introduction

Automatic signals type recognition is an important topic for both the civil and military domain. Signal type recognition classification is also believed to play an important part in future 4G software radios [1]. The general idea behind the software radio architecture is to perform a considerable amount of the signal processing in software instead of it being defined in hardware. This would enable the radio to adapt to a changing environment and user requirements by simply updating the software or by using adaptable software systems. In such scenarios, a broadcaster could for example change to appropriate modulation schemes according to the capacity of the channel. A receiver incorporating automatic modulation recognition could then handle this in real times.

Automatic signal classification methods, usually, divided two principle techniques. One is the decision theoretic approach and the other is pattern recognition. Decision theoretic approaches use probabilistic and hypothesis testing arguments to formulate the recognition problem [2-3]. These methods suffer from their very high computational complexity, difficulty to implementation and lack of robustness to model mismatch [7]. Pattern recognition approaches, however, do not need such careful treatment. They are easy to implement. They can be further divided into two subsystems: the feature extraction subsystem and the classifier subsystem. The former extracts prominent characteristics from the raw data, which are called features, and the latter is a classifier [4-14].

In [9], for the first time, Ghani and Lamontagne proposed using the multi-layer perceptron (MLP) neural

network with back-propagation (BP) learning algorithm for automatic signal type identification. They showed that neural network classifier outperforms other classifiers such as K-Nearest Neighbor (KNN). In [10], power spectral density (PSD) measurements were used in conjunction with neural networks to identify the signal's type. The approach was to transform the signal into its power spectrum and then to use that power spectrum as input to a backpropagation neural network. This approach worked well for signals of interest whose power content distinctively varied with changes in frequency. It did not work as well with signal types like PSK. In [11], the authors introduced two classifiers: neural network classifier and fixed threshold classifier, for analog and digital modulation recognition. They showed that the neural network classifier has a higher performance than the threshold classifier. The overall success rate is over 96% at the SNR of 15 dB. In [12], the authors proposed an identifier for the identification of PSK2, PSK4, PSK8, OQPSK, MSK, QAM16, QAM32, FSK2 and FSK4 signal types. The features chosen to characterize the signal types are the mean and the next three moments of the instantaneous characteristics. They used different classifiers and showed that the artificial neural network has better performance than K-Nearest Neighbor (KNN) classifier and the well known binary decision trees. They reported a success rate of 90% with SNR ranges 15-25 dB. However, the performance for lower SNRs is reported to be less than 80%. In [13], the authors proposed an identifier based on cyclic spectral features for identification of AM, USB, LSB, FM, ASK, FSK, BPSK, QPSK and SQPSK. It was claimed that

cyclic spectrum posses more advantage than power spectrum in signal type recognition. A full-connected backpropagation neural network is used for classification in that research. The success rate of this identifier is reported around 90% with SNR ranges 5-25 dB. In [14], the authors have used a combination of the symmetry, fourth order cumulants and power moments of the received signals as the features for identification of PSK2, PSK4, PSK8, QAM16 and QAM32. The classifier was a modified MLP neural network (with few output nodes). They reported a success rate about 92% at SNR of 8dB. In [15], the authors have introduced an identifier based on discrete wavelet decompositions and adaptive network based fuzzy interference system for recognition of ASK8, FSK8, PSK8 and QASK8.

Most of the methods can only recognize a few types of digital signal and/or lower order of digital signal types. They usually need high SNRs in order to achieve the minimum acceptable performance (80%). Basically, this is due to the classifier and the features that are used. Finding the suitable features is a very important step for recognition of these digital signals. From the published works it can be found that the methods, which use the higher order statistical features, are able to include the digital signal types such as QAM and higher orders of digital signals [6-12]. In this paper we have used a combination of the higher order moments and higher order cumulants (up to eighth) as the effective features for recognition of the considered digital signals. The identifiers that use artificial neural networks (ANNs) as the classifier have high performances [12-14]. In this paper we have used a multi-layer perceptron (MLP) neural network with self adaptive step-size (SASS) learning algorithm as the classifier [15]. We have used particle swarm optimization, in order to reduce the complexity of the proposed identifier.

The paper is organized as follows. Section 2 describes the feature extraction module. Section 3 presents the classifier. Optimization module is introduced in Section 4. Section 5 shows some simulation results. Finally, Section 6 concludes the paper.

2 Feature extraction

A typical pattern recognition system after doing some pre-processing operations, often reduce the size of a raw data set by extracting some distinct attributes called features. The need for feature extraction comes to scene due to the possible inability to use the raw data. These features define a particular pattern. In the signal recognition area, choosing the good features, not only enable the classifier to distinguish more and higher digital signals, but also help to reduce the complexity of the classifier.

In this paper we have considered the following digital signals: ASK2, ASK4, ASK8, PSK2, PSK4, PSK8, QAM16, QAM32, QAM64, Star-QAM8, and V32. For simplifying the indication, the signals ASK2, ASK4, ASK8, PSK2, PSK4, PSK8, QAM16, QAM32, QAM64, Star-QAM8, and V32 are substituted with P_1 , P_2 , P_3 , P_4 , P_5 , P_6 , P_7 , P_8 , P_9 , P_{10} , and P_{11} respectively. Different

types of the digital signal have different properties; therefore finding the proper features in order to identify them (especially in case of higher order and/or non-square) is a difficult task. Based on our researches, a combination of the higher order moments and higher order cumulants up to eighth make provide a fine way for discrimination of the considered digital signal types.

Probability distribution moments are a generalization of concept of the expected value, and can be used to define the characteristics of a probability density function [16]. The auto-moment of the random variable may be defined as follows:

$$M_{pq} = E[s^{p-q} (s^*)^q] \quad (1)$$

where p called moment order and s^* stands for complex conjugation. Now, consider a zero-mean discrete based-band signal sequence of the form $s_k = a_k + jb_k$. Using the definition of the auto-moment, the expressions for different order may be easily derived.

Consider a scalar zero mean random variable s . The symbolism for p^{th} order of cumulant is:

$$C_{pq} = Cum[\underbrace{s, \dots, s}_{(p-q) \text{ terms}}, \underbrace{s^*, \dots, s^*}_{(q) \text{ terms}}] \quad (2)$$

3 Classifier

We have used a MLP neural network as the classifier. A MLP neural network consists of an input layer of source nodes, one or more hidden layers of computation nodes (neurons) and an output layer [17]. The number of nodes in the input and the output layers depend on the number of input and output variables, respectively. In this paper a single hidden layer MLP neural network was chosen as the classifier. The issue of learning algorithm is very important for MLP. Backpropagation (BP) learning algorithm is still one of the most popular algorithms. In BP a simple gradient descent algorithm updates the weight values. However under certain conditions, the BP network classifier can produce non-robust results and easily converge to local minimum. Moreover it is time consuming in training phase. New algorithms have been proposed so far in order to network training. However, some algorithms require much computing power to achieve good training, especially when dealing with a large training set.

In this paper, SASS learning algorithm is used [17]. SASS is an adaptive step-size method. it is based on the bisection method for minimization in one dimension, in which the minimum of a valley is found by taking a step in the descent direction of half the previous step. The method has been adapted to allow the step-size to both increase and decrease. It uses the same update rule resilient but updates Δ_{ij} differently. It uses two previous signs and has an increment factor of 2.

Table2: Correct matrix of the identifier (without feature selection) at SNR=10dB.

	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	P ₈	P ₉	P ₁₀	P ₁₁
P ₁	99										
P ₂		100									
P ₃			98.8								
P ₄				100							
P ₅					98						
P ₆						100					
P ₇							98.6				
P ₈								98			
P ₉									98.4		
P ₁₀										98.2	
P ₁₁											98.4

Table3: The performances of the identifier (without feature selection) at different SNR values.

SNR	Training	Testing
-5	85.45	83.76
0	89.85	88.52
5	96.75	96.55
10	98.90	98.85
15	99.25	99.14

Table4: The performances of identifier (without feature selection) at SNR=50dB.

	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	P ₈	P ₉	P ₁₀	P ₁₁
P ₁	100										
P ₂		100									
P ₃			100								
P ₄				99.6							
P ₅					100						
P ₆						100					
P ₇							100				
P ₈								99.6			
P ₉									100		
P ₁₀										99.8	
P ₁₁											99.4

As mentioned the speed of learning algorithm is an important issue for MLP. The efficiency of the learning algorithm affects the amount of experimentation that can be done. To indicate the effectiveness of chosen learning algorithm (SASS), we have compared it with the SUPERSAB learning algorithm that is an adaptive learning rate algorithm [20]. In SUPERSAB learning algorithm each weight w_{ij} , connecting node j with node i , has its own learning rate that can vary in response to error surface. The system that uses MLP with SUPERSAB learning algorithm as the classifier is named as TECH2. Based our experiments, any number in the vicinity of 40 neurons seems to be adequate for reasonable classification. Other simulations setup is the

same. Table 5 shows the performance of TECH2. Table 8 presents the comparison between SPROI (that uses MLP with SASS learning algorithm as the classifier) and TECH2. It can be seen that the performance of the SPROI (that uses MLP with SUPERSAB learning algorithm as the classifier). It can be seen that SPROI has better performance than TECH2.

Table7: The performance of TECH2 at different levels of SNR.

SNR	Training	Testing
-5	73.46	72.35
0	82.42	80.24
5	86.70	85.42
10	94.64	92.45
15	96.25	94.65

Table6: Comparison between SPROI and TECH2: the testing performance and the number of epochs that are needed.

SNR	SASS		SUPERSAB	
	Passed Epochs	Testing	Passed Epochs	Testing
-5	725	83.76	1245	72.35
0	324	88.52	685	80.24
5	565	96.55	1575	85.42
10	364	98.85	978	92.45
15	485	99.14	1245	94.65

5.2 Performance of the identifier with using the optimizer

We have tested the identifier using several features selected using PSO. The selection of the PSO parameters plays an important role in the optimization.

Table 7 shows the performances of the identifier using four features selected by PSO. Table 8 shows this performance using seven features selected by PSO. Table 9 show the performance of the identifier using eighteen features selected by PSO. Also in these tables the performances of identifier without feature selection is showed. It can be seen that in Table 8 the identifier records a performance degradation less than 1% only at SNR= -5dB. For other levels of SNR, the difference is negligible. Thus it can be said that the proposed method achieves high performance on most SNR values with only seven features that have been selected using PSO. Tables 10-11 show the correct matrices of identifier at SNR= 5 dB and SNR=10 with seven features that have been selected by PSO. It is found that proposed is able to identify the different types of digital signal with high accuracy only seven selected features using PSO.

Table7: Testing performance (TP) of the identifier with five features selected using PSO.

SNR	TP with applying PSO	TP without PSO
-5	80.15	83.76
0	83.25	88.85
5	91.20	96.55
10	94.68	98.85
15	97.51	99.14

Table8: Testing performance (TP) of the identifier with seven features selected using PSO.

SNR	TP with applying PSO	TP without PSO
-5	82.90	83.76
0	88.25	88.85
5	96.18	96.55
10	98.50	98.85
15	99.02	99.14

Table9: Testing performance (TP) of the identifier with twenty features selected using PSO.

SNR	TP with applying PSO	TP without PSO
-5	83.45	83.76
0	88.60	88.85
5	96.25	96.55
10	98.65	98.85
15	99.08	99.14

Table12: Correct matrix of PROI with only seven features selected using PSO at SNR=5dB.

	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	P ₈	P ₉	P ₁₀	P ₁₁
P ₁	97										
P ₂		97									
P ₃			96.5								
P ₄				100							
P ₅					95						
P ₆						97					
P ₇							92.5				
P ₈								97			
P ₉									94		
P ₁₀										97.5	
P ₁₁											94.5

Table13: Correct matrix of PROI with only seven features selected using PSO at SNR=10dB.

	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	P ₈	P ₉	P ₁₀	P ₁₁
P ₁	99										
P ₂		100									
P ₃			99								
P ₄				100							
P ₅					97						
P ₆						100					
P ₇							98				
P ₈								98			
P ₉									97.5		
P ₁₀										97	
P ₁₁											98

As mentioned the features play a vital role in signal identification. In order to indicate the effectiveness of the chosen features, we have used the features that have been introduced in [7]. We name this identifier as THECH3. Other simulations setup is the same. Figure1 show a

comparison between TECH3 and our proposed identifier (PROI) at different SNRs. Results imply that our chosen features have effective properties in signal representation.

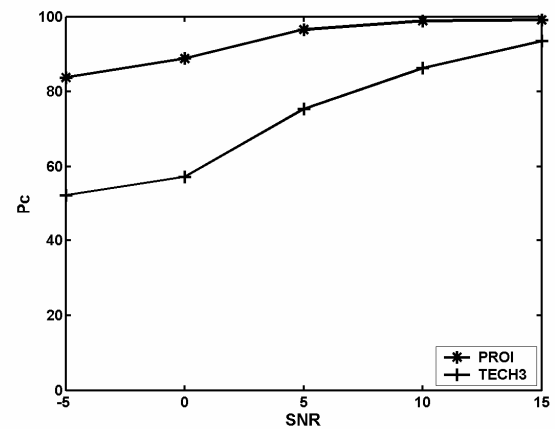


Figure1: Performances comparison between PROI and TECH3.

6 Conclusions

Automatic signal type identification is an important issue for both the civilian and military domain. Most of the techniques can only identify a few kinds of digital signal and/or lower orders of digital signals. They usually need high SNRs for identification of the considered digital signals. These problems are mainly due to two facts: the features and the classifier that are used in the identifiers. In this paper we have proposed a number of the features, i.e. a combination of the higher order moments and the higher order cumulants (up to eighth), which have high ability in representing of the digital signal types. As the classifier, we have proposed a MLP neural network with SASS learning algorithm as the classifier. This classifier has high classification ability. By using the mentioned features and classifier, we have presented a highly efficient identifier. This identifier discriminates a lot of digital signal types with high accuracy even at very low SNRs. But there are a lot of features are used for this identification. In order to reduction the complexity of the proposed identifier we have used an optimizer, i.e. PSO. Using this idea reduces the number of features without trading off the generalization ability and accuracy. The optimized identifier also has high performance for identification of the considered different kinds of digital signal even all SNRs. This high efficiency is achieved with only seven features, which have been selected using particle swarm optimizer. One the advantage of the swarmed features selection is its simple implementation. Furthermore in PSO to switch from one approach to another approach is also easy. For future works, we can use the PSO in order to construct of the classifier as well as the features selection. Also we can consider another set of digital signal types and evaluate this technique for identification of them. We can select the proper features that introduced by others and combine them with the features that are proposed in this paper in order to have suitable

features set for identification the different types of digital signal.

References

- [1] K.E. Nolan, L. Doyle, P. Mackenzie, D. O. Mahony (2002). Modulation Scheme Classification for 4G Software Radio Wireless Network. *Proc. IASTED*.
- [2] W. Wei and J. M. Mendel, "Maximum-likelihood classification for digital amplitude-phase modulations," *IEEE Trans. Commun.*, vol. 48, pp. 189-193, 2000.
- [3] P. Panagiotou, and A. Polydoros, "Likelihood ratio tests for modulation classifications," *Proc. MILCOM*, pp. 670-674, 2000.
- [4] S. Z. Hsue, and S. S. Soliman, Automatic modulation classification using Zero-Crossing, *IEEE Proc. Radar, Sonar and Navigation*, vol. 137, 1990, pp. 459-464.
- [5] B. G. Mobasseri, "Digital modulation classification using constellation shape," *Signal Processing*, vol. 80, pp. 251–277, 2000.
- [6] J. Lopatka, and P. Macrej, "Automatic modulation classification using statistical moments and a fuzzy classifier," *Proc. ICSP*, pp.121-127, 2000.
- [7] A. Swami, and B. M. Sadler, "Hierarchical digital modulation classification using cumulants," *IEEE Trans. Comm.*, vol. 48, pp. 416–429, 2000.
- [8] C. M. Spooner, "Classification of cochannel communication signals using cyclic cumulants," *Proc. ASILOMAR*, pp. 531-536, 1995.
- [9] O. A. Dobre, Y. Bar-Ness, and W. Su, "Robust QAM modulation classification algorithm based on cyclic cumulants," *Proc WCNC*, pp. 745-748, 2004.
- [10] A. E. Shermeh, D. Movahedi, "Signal identification using an efficient method," *ICS 2007*.
- [11] C. M. Spooner, W. A. Brown, and G. K. Yeung, "Automatic radio-frequency environment analysis," *Proc. ASILOMAR*, pp. 1181-1186, 2000.
- [12] A. E. Shermeh, D. Movahedi, "Automatic digital modulation identification using an intelligent method," *ICS 2007*.
- [13] C. L. P. Sehier, "Automatic modulation recognition with a hierarchical neural network," *Proc. MILCOM*, pp. 111–115, 1993.
- [14] A.K. Nandi, E.E. Azzouz, "Algorithms for automatic modulation recognition of communication signals," *IEEE Trans. Comm.*, vol. 46, pp. 431–436, 1998.
- [15] E. Avci, D. Hanbay and A. Varol, "An expert disceret wavelet adaptive network based fuzzy inference system for digital modulation recognition," *Expert Systems with Applications*, 2006.
- [16] J. Hannan, M. bishop, "A class of fast artificial NN learning algorithms", Tech. Report, JMH-JMB 0/96, Dep. of Cybernetics, University of Reading, 1996.
- [17] C. L. Nikias and A. P. Petropulu, *Higher-Order Spectra Analysis: A Nonlinear Signal Processing Framework*. Englewood Cliffs, NJ: PTR Prentice-Hall, 1993.
- [18] S. Haykin, *Neural Networks: A Comprehensive Foundation*. New York: MacMillan, 1994.
- [19] R. C. Eberhart, and J. Kennedy, A new optimizer using particle swarm theory, *Proc. ISMMH S*, 1995, pp. 39-43.
- [20] Y. Shi and R. C. Eberhart, A Modified Particle Swarm Optimizer, in *Proc. IJCNN*, 1999, pp. 69-73.
- [21] T. Tollenaere, Supersab: fast adaptive bp with good scaling properties, *Neural Networks*, Vol.3, 1990, pp. 561-573.